



## Directions for Assembling the R810-4.1 Teleprompter

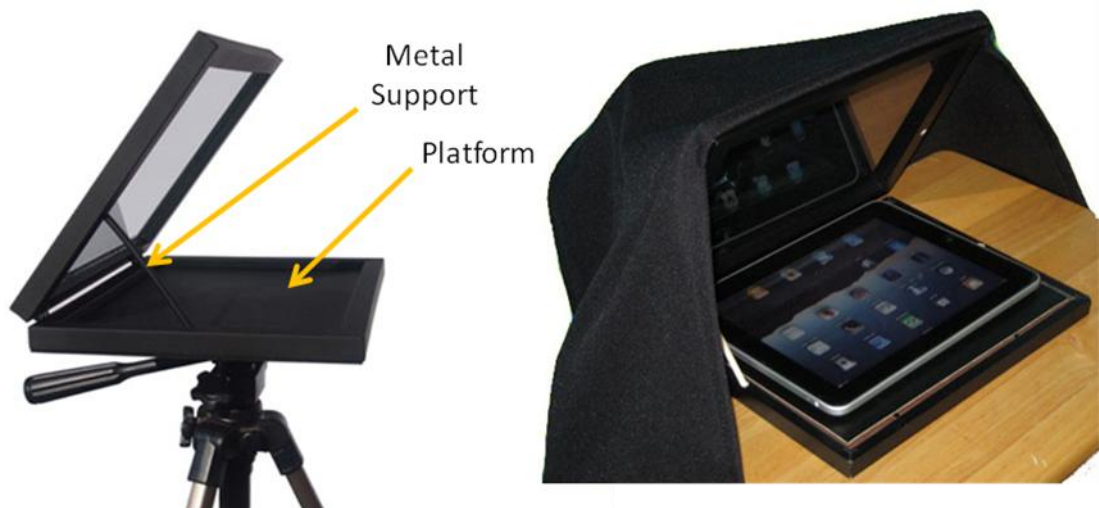

1. Attach the teleprompter to your tripod or place it on a table.
2. Open the teleprompter and attach the metal support by inserting one end into the hole on the glass side. Then insert the other end into the platform side. You will notice that the holes do not naturally align. This is part of the design. Use a little force to bend the support so it goes into the hole. The fit should be tight and the structure of the open teleprompter should be rigid.
3. If you are using the iPhone as the camera, assemble the C-bracket and iPhone tripod adaptor to use the iPhone as the camera: Place both washers onto the wing screw. Place the wing screw through the bottom side of the slot that runs side-to-side on the C-Bracket and screw on the tripod adaptor. Notice the positioning of the adaptor. It is closer to the glass than the iPhone.

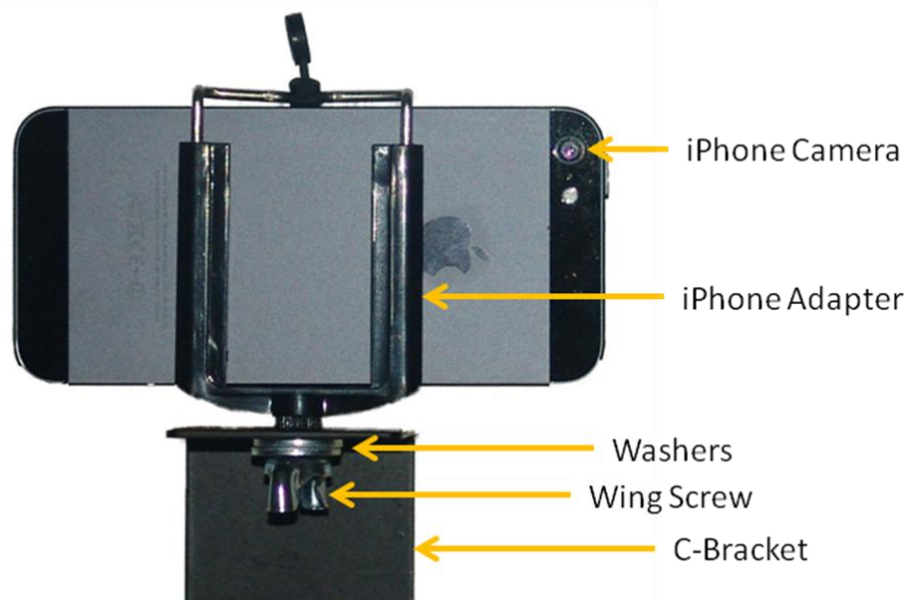

4. Attach the C-bracket / tripod adaptor to the bottom of the teleprompter. There are two holes drilled to place the C-bracket / tripod adaptor on the left or the right. Your choice may depend on which version of the iPhone you are using. As indicated in the photo below you may want to attach the iPhone 5 on the right. Since the iPhone 6 is bigger, you may want to place the C-bracket / tripod adaptor on the left. You should experiment based on the placement of the iPhone's camera and whether the camera captures the frame of the teleprompter or not. Remove the nut on the bottom (and near the back ) of the teleprompter and attach the C-bracket / tripod adaptor. Use the slot on the C-bracket that points in the direction from the front to the back of the teleprompter. This slot allows you to move the bracket closer or further away from the beam splitter glass. While assembling, slide the C-bracket furthest away from the glass so it does not touch the glass. If necessary, you can move the bracket closer to the glass after it is secured to the teleprompter.



View from the back of the teleprompter

5. Place your projection device (iPad, Android tablet, iPhone, or Smartphone) onto the platform.
6. Place your camera into position behind the teleprompter and get it ready to videotape. If you are using the iPhone as the camera, adjust its positioning so its camera is in the middle of the glass from side-to-side.
7. Secure the black cape to the teleprompter by lining-up the Velcro tabs on the cape with those on the sides of the teleprompter. Feel free to modify the cape to your preference.
8. Prepare the projection device by launching the teleprompter software.

Go to [Interactmedia.net](http://Interactmedia.net) to learn more. If you have questions, contact Scott at 248-660-4984. Thank you for your purchase.